


CCA-003 CCA-004

CCA-006

CCA-003

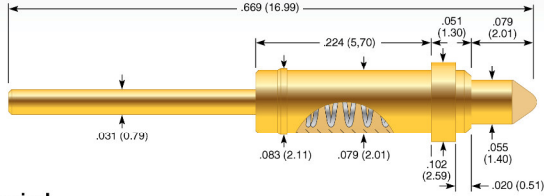

Mechanical

Recommended Travel:	.040 (1.00)
Full Travel:	.078 (1.98)
Operating Temperature:	-35°C to +105°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	1.27 (36)	2.94 (85)


Electrical (Static Conditions)

Current Rating:	10 amps
Average Probe Resistance:	<50 mOhms

Materials and Finishes

Plunger:	Brass, Gold plated
Barrel:	Brass, Gold plated
Spring:	Music Wire, Gold plated

CCA-006

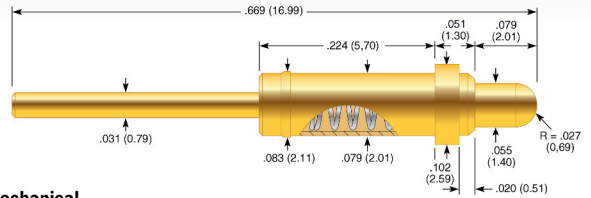

Mechanical

Recommended Travel:	.040 (1.00)
Full Travel:	.078 (1.98)
Operating Temperature:	-35°C to +105°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	1.24 (35)	2.94 (85)


Electrical (Static Conditions)

Current Rating:	5 amps
Average Probe Resistance:	<50 mOhms

Materials and Finishes

Plunger:	Brass, Gold plated
Barrel:	Brass, Gold plated
Spring:	Music Wire, Gold plated

CCA-004

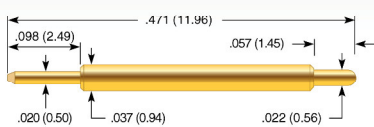

Mechanical

Recommended Travel:	.040 (1.00)
Full Travel:	.057 (1.45)
Operating Temperature:	-35°C to +105°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	0.83 (23)	2.85 (81)

Electrical (Static Conditions)

Current Rating:	10 amps
Average Probe Resistance:	<50 mOhms

Materials and Finishes

Plunger:	Brass, Gold plated
Barrel:	Brass, Gold plated
Spring:	Music Wire, Gold plated