
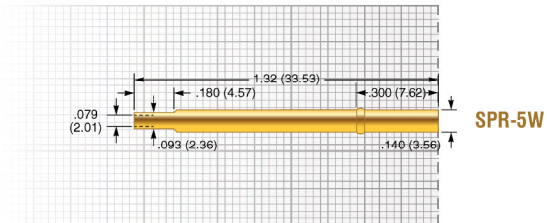


## MSP-5C

187 mil (4.75 mm)

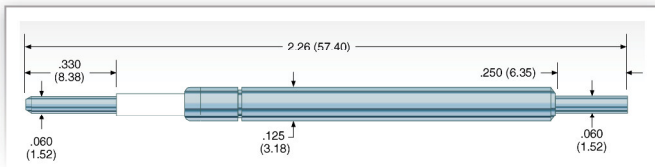

### Mechanical

Recommended Travel:	.132 (3.35)
Full Travel:	.185 (4.70)
Switch Point ( $\pm .012$ ):	.025 (0.64)
Operating Temperature:	-55°C to +105°C

### Spring Force in oz. (grams)

Order Code	Switch Point	Rec. Travel
<b>Standard</b>	2.5 (70)	5.2 (146)
<b>Alternate</b> - 1	26.9 (755)	35.0 (992)

### Electrical (Static Conditions)

Current Rating:	5 amps
Average Probe Resistance:	<20 mOhms

### Materials and Finishes

Plunger:	Brass, Nickel plated
Barrel:	Brass, Silver plated
Spring:	Stainless Steel, Silver plated
Insulator:	KEL-FTM
Terminal:	Brass, Silver plated

Dimensions in inches (millimeters). Specifications subject to change without notice.  
 Consult factory for other temperature requirements, and applications below -40°C.  
 Stocking Disclaimer: Stocking levels for part numbers listed in this catalog are subject to change.  
 Availability is based on current levels of usage and demand.

