
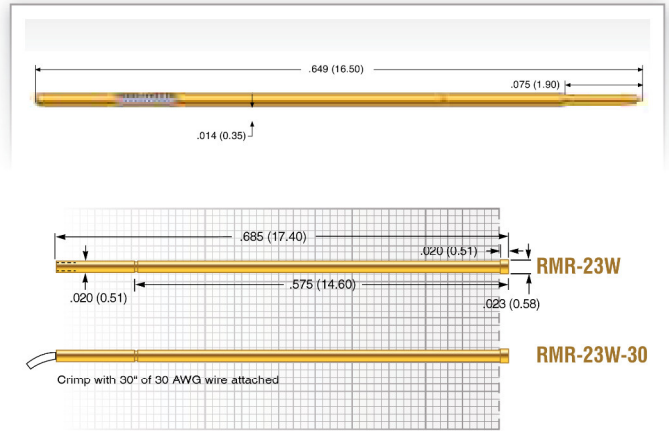


RMP-22B

20 mil (0.51 mm)

RMPJ-23B

30 mil (0.76 mm)

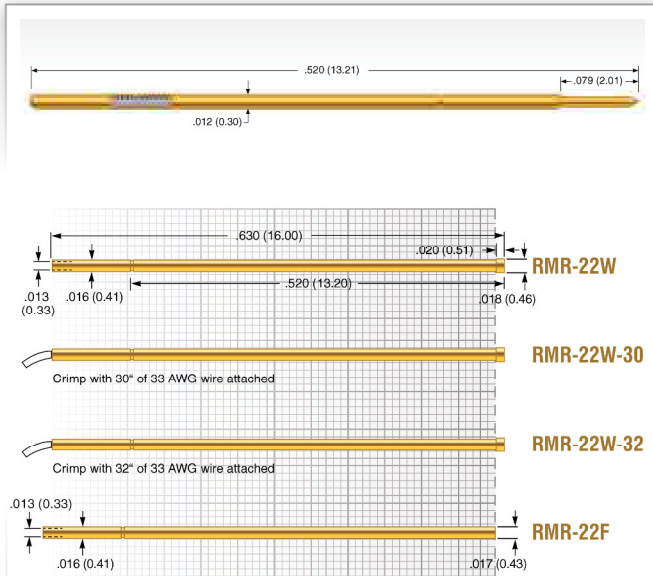

Mechanical

Recommended Travel:	.052 (1.33)
Full Travel:	.079 (2.01)
Operating Temperature:	-35°C to +105°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	0.51 (14)	1.69 (48)

Electrical (Static Conditions)

Current Rating:	2 amps
Average Probe Resistance:	<125 mOhms

Materials and Finishes

Plunger:	Heat-treated Steel, Nickel Boron plated
Barrel:	BeCu alloy, Gold plated
Spring:	Music Wire, Gold plated

Receptacle

Hole diameter:	Ø .016 to .017 (0.41 to 0.43)
Suggested drill:	#78 or 0.42 mm
Material Housing:	Heat-treated BeCu, Gold plated over hard Nickel

Tip Style

B				
Ø .008 (0.20)				

Mechanical

Recommended Travel:	.050 (1.27)
Full Travel:	.075 (1.90)
Operating Temperature:	-50°C to +150°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	0.23 (8)	1.1 (31)

Electrical (Static Conditions)

Current Rating:	2 amps
Average Probe Resistance:	<125 mOhms

Materials and Finishes

Plunger:	Heat-treated Steel, Nickel Boron plated
Barrel:	Phosphor Bronze, Gold plated
Spring:	Stainless Steel, Gold plated

Receptacle

Hole diameter:	Ø .020 to .021 (0.52 to 0.54)
Suggested drill:	#76 or 0.52 mm
Material Housing:	Phosphor Bronze, Gold plated

Tip Style

B				
Ø .009 (0.23)				