
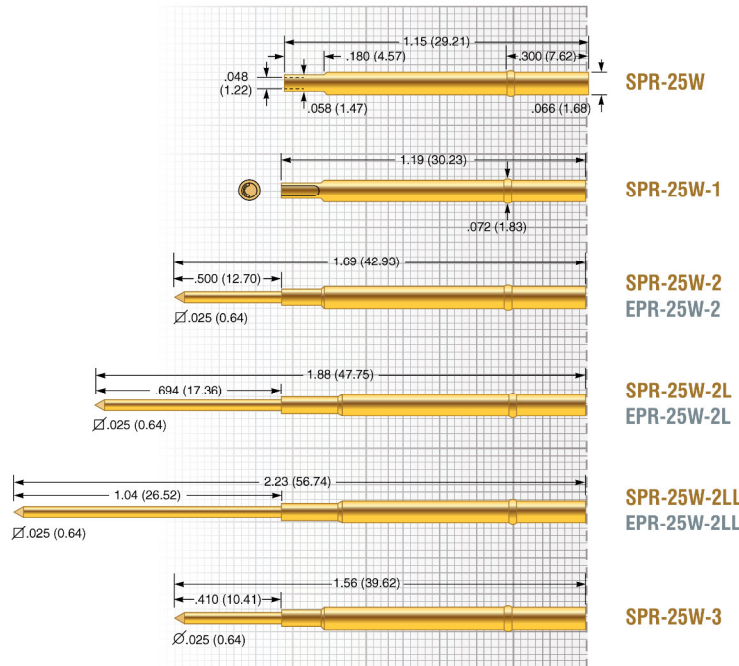


SPP-25

100 mil (2.54 mm)

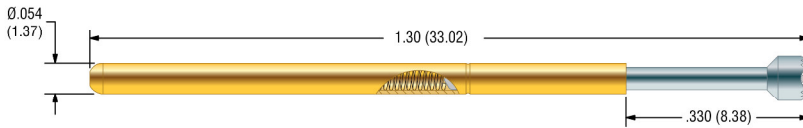

Mechanical

Recommended Travel: .167 (4.24)
 Full Travel: .250 (6.35)
 Operating Temperature: -55°C to +105°C

Spring Force in oz. (grams)

	Order Code	Preload	Rec. Travel
Standard	-4	0.84 (23.8)	4.0 (114)
Alternate	-6	3.08 (87.3)	6.0 (170)

Electrical (Static Conditions)

Current Rating: 8 amps
 Average Probe Resistance: 8 mOhms

Materials and Finishes

Plunger: BeCu, LFRE proprietary plating
 Barrel: Nickel Silver, Gold plated
 Spring: 4 oz Stainless steel, Gold plated

Receptacle

Hole diameter: Ø .067 to .069 (1.70 to 1.75)
 Suggested drill: #51 or 1.75 mm
 Material Housing: Brass, Gold plated
 Material Post: Phosphorous Bronze, Gold plated

Tip Style

H	HF				
Ø .060 (1.52)	Ø .080 (2.03)				

Dimensions in inches (millimeters). Specifications subject to change without notice.
 Consult factory for other temperature requirements, and applications below -40°C.
 Stocking Disclaimer: Stocking levels for part numbers listed in this catalog are subject to change.
 Availability is based on current levels of usage and demand.



ECT-CPG.com
 shop.ECT-CPG.com