
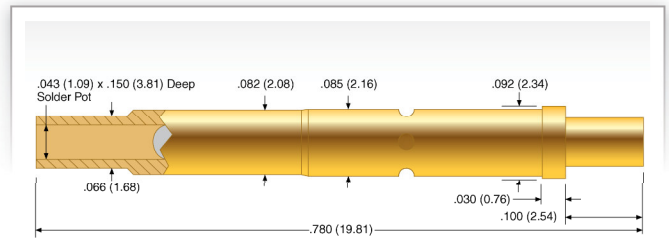


F-S

125 mil (3.18 mm)

G-S

125 mil (3.18 mm)

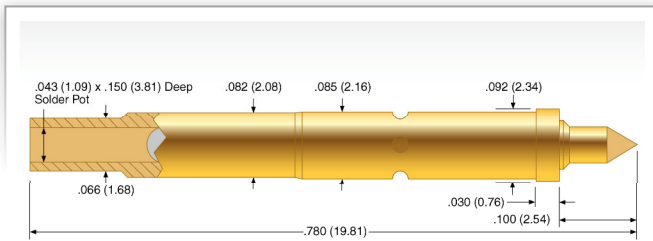

Mechanical

Recommended Travel: .066 (1.68)
 Full Travel: .100 (2.54)
 Operating Temperature: -55°C to +150°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	2.0 (57)	6.0 (170)

Electrical (Static Conditions)

Current Rating: 5 amps
 Average Probe Resistance: <30 mOhms

Materials and Finishes

Plunger: Work hardened BeCu, Gold plated or Work hardened Brass, Gold plated
 Barrel: Brass, Gold plated
 Spring: Stainless Steel, Gold plated
 Ball: Stainless Steel, Gold plated

Epoxy Mounting

Hole diameter: Ø .0860 (2.18)
 Suggested drill: #44

Tip Style

C	R	W		
Ø .045 (1.14)	Ø .045 (1.14)	Ø .090 (2.29)		
	Brass			

Mechanical

Recommended Travel: .067 (1.68)
 Full Travel: .100 (2.54)
 Operating Temperature: -55°C to +150°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	3.0 (85)	6.0 (170)

Electrical (Static Conditions)

Current Rating: 5 amps
 Average Probe Resistance: <30 mOhms

Materials and Finishes

Plunger: Work hardened BeCu, Gold plated
 Barrel: Brass, Gold plated
 Spring: Stainless Steel, Gold plated
 Ball: Stainless Steel, Gold plated

Mounting

Hole diameter: Ø .0860 (2.18)
 Suggested drill: #44

Tip Style

F	R			
Ø .061 (1.55)	Ø .061 (1.55)			

Dimensions in inches (millimeters). Specifications subject to change without notice. Consult factory for other temperature requirements, and applications below -40°C. Stocking Disclaimer: Stocking levels for part numbers listed in this catalog are subject to change. Availability is based on current levels of usage and demand.

Series	Tip Style
F-S	C
G-S	F