


P2532

156 mil (3.96 mm)

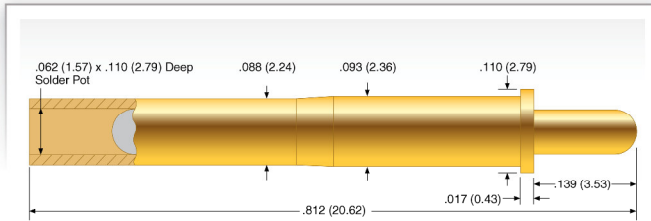

Mechanical

Recommended Travel: .093 (2.36)
 Full Travel: .139 (3.53)
 Operating Temperature: -55°C to +150°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	1.0 (28)	2.3 (65)

Electrical (Static Conditions)

Current Rating: 5 amps
 Average Probe Resistance: <30 mOhms

Materials and Finishes

Plunger: Work hardened BeCu, Gold plated
 Barrel: Brass, Gold plated
 Spring: Stainless Steel
 Ball: Stainless Steel, Gold plated

Epoxy Mounting


Hole diameter: Ø .0945 (2.40)
 Suggested drill: #41 mm or 2.40 mm

Tip Style

1	2			
Ø .059 (1.50)	Ø .059 (1.50)			

P2550

187 mil (4.75 mm)

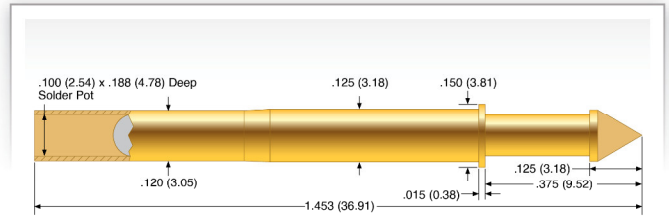

Mechanical

Recommended Travel: .167 (4.24)
 Full Travel: .250 (6.35)
 Operating Temperature: -55°C to +150°C

Spring Force in oz. (grams)

	Preload	Rec. Travel
Standard	1.00 (28)	3.20 (91)
High	-8	4.00 (113) 6.70 (190)

Electrical (Static Conditions)

Current Rating: 5 amps
 Average Probe Resistance: <30 mOhms

Materials and Finishes

Plunger: Work hardened BeCu, Gold plated
 Barrel: Brass, Gold plated
 Spring: Stainless Steel
 Ball: Stainless Steel, Gold plated

Epoxy Mounting

Hole diameter: Ø .126 (3.20)
 Suggested drill: #30 or 3.20 mm

Tip Style

8	0	6	9	
Ø .156 (3.96)	Ø .122 (3.10)	Ø .154 (3.91)	Ø .125 (3.18)	

