
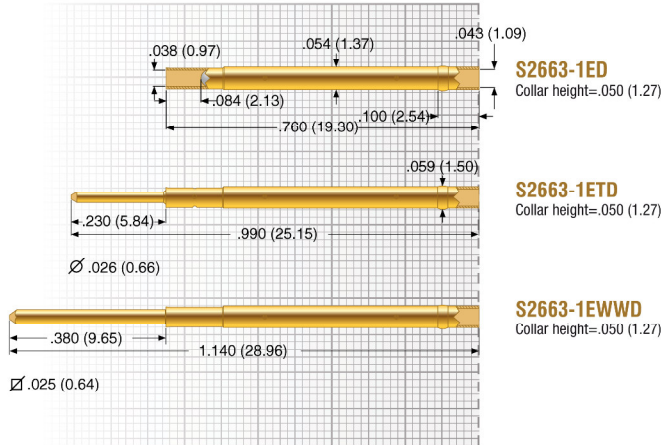


P2663

75 mil (1.91 mm)

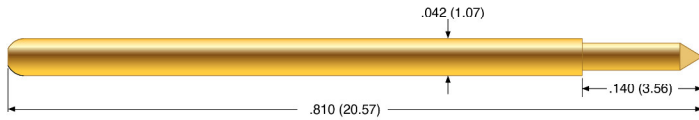

Mechanical

Recommended Travel: .067 (1.70)
 Full Travel: .090 (2.29)
 Operating Temperature: -55°C to +150°C

Spring Force in oz. (grams)

	Order Code	Preload	Rec. Travel
Standard	- 1	1.50 (42)	3.3 (94)
Alternate	- 2	1.00 (28)	2.0 (57)

Electrical (Static Conditions)

Current Rating: 3 amps
 Average Probe Resistance: < 10 mOhms

Materials and Finishes

Plunger: Hardened BeCu, Gold plated
 Barrel: Phosphorous Bronze, Gold plated
 Spring: Stainless Steel
 Ball: Stainless Steel

Receptacle

Hole diameter: Ø .0561 to .0576 (1.43 to 1.46)
 Suggested drill: 1.45 mm
 Material Housing: Brass, Gold plated
 Material Post: Phosphorous Bronze, Gold plated

Tip Style					
1C	1P	1R	1V	1W	
Ø .030 (0.76)	Ø .060 (1.52)	Ø .030 (0.76)	Ø .050 (1.27)	Ø .060 (1.52)	
		r = .018 (0.46)			

Dimensions in inches (millimeters). Specifications subject to change without notice.
 Consult factory for other temperature requirements, and applications below -40°C.
 Stocking Disclaimer: Stocking levels for part numbers listed in this catalog are subject to change.
 Availability is based on current levels of usage and demand.



ECT-CPG.com
 shop.ECT-CPG.com

